


FITTING OF TRIMMER LINE

1. Holding trimmer head cup firmly, loosen and remove the bump feed lock knob with the two (2) prong spanner in an anticlockwise direction.



2. Divide a 6mt length of 2.00mm trimming line in half and place centre of halved line into the holding slot in the centre ring of the line carrier.

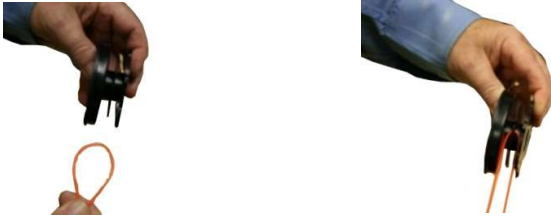

3. Feed each length of halved line (in a clockwise direction) onto each section of the line carrier.



4. When line is coming to the end, lock each end of the line into the mounting pins of line carrier at opposite sides 180° apart.



5. Feed each end of locked trimming line through trimmer head cup eyelets and place bump spring between inside base of trimmer head cup and line carrier.



6. Squeeze both halves together, hold firmly and place refilled trimmer head onto machine, locking the assembly in place with the bump feed lock knob (turning in a clockwise direction).



7. Pull each length of line further through the eyelet holes and your trimmer is ready for use again.

